



**Color Variants**

CG290211  
Glass ceramic  
Width 90 cm

**Optional accessories**

WP400001  
Wok pan made of multiple-layer material

CG290211  
Gas cooktop  
Glass ceramic  
Width 90 cm  
Natural gas 20 mbar  
Nozzles for liquid gas 50 mbar included

For flush or conventional installation  
Two-ring burner with 6000 W

**Cooking zones**

1 wok burner with 2 separately adjustable flame rings (300 W - 6000 W), suitable for pots up to max. ø 32 cm.  
1 high output burner (590 – 2800 W), suitable for pots up to max. ø 26 cm.  
2 standard burners (370 – 1900 W), suitable for pots up to max. ø 20 cm.  
1 economy burner (310 – 1100 W), suitable for pots up to max. ø 14 cm.

**Handling**

Control knobs with cooking zone and output level markings.  
One-handed operation.  
Electric ignition.

**Features**

Three-part cast pan support with continuous pot surface.  
Enamelled burner cover.

**Safety**

Thermoelectric safety pilot.

**Planning notes**

The cooktop can be conventionally built into worktops or flush integrated into stone worktops.  
Special nozzles can be ordered as spare parts.  
Installation in a 85 cm niche or a 88 cm niche with the included spacers.  
Air intake from above.  
Intermediate shelf is required.  
Appliance must be fixed from underneath.  
A minimum lateral clearance of at least 150 mm from adjacent heat-sensitive furniture or contact surfaces must be observed or thermal insulation fitted.  
Cooktop clamping range: 30 - 50 mm.  
An air extraction hood must be switched on during operation of the gas cooktop.  
Distance between ventilation hood and gas cooktop at least 760 mm.

**Connection**

Total connected load gas 13.7 kW.  
Connecting cable 1.0 m with plug.


**Characteristics**

Product name/family  
gas hob w integrated controls  
Construction type  
Built-in  
Energy input  
Gas  
Total number of positions that can be used at the same time  
5  
Type of control setting devices  
Rotary knob  
Required niche size for installation (HxWxD)  
45 x 850 x 490  
Width of the product (mm)  
914  
Dimensions of the product (mm)  
95 x 914 x 520  
Net weight (kg)  
20.000  
Gross weight (kg)  
22.000  
Residual heat indicator  
without  
Location of control panel  
Hob front  
Type of external control possibility  
Basic surface material  
Ceramic  
Color of surface  
Black  
Color of frame  
Black  
Approval certificates  
AENOR, CE  
Length electrical supply cord (m)  
100.0


**Consumption and connection features**

Electrical connection rating (W)  
1  
Gas connection rating (W)  
13700  
Current (A)  
Voltage (V)  
230  
Frequency (Hz)  
50


created on 2014-05-13  
Page 1

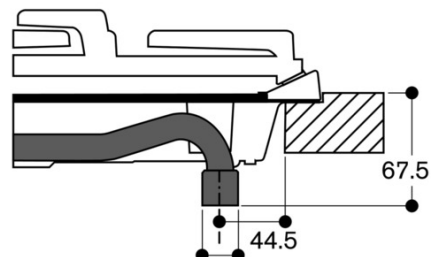

**View from above**

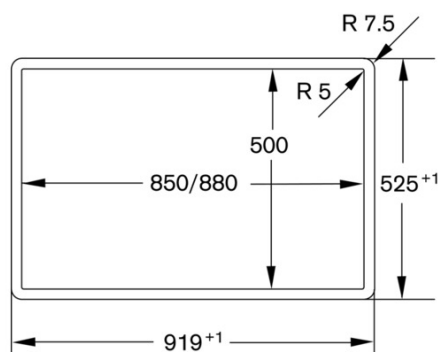

### Longitudinal section

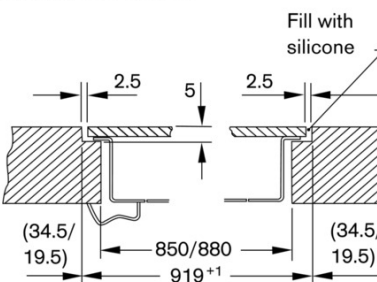

Technical drawing of a mechanical part, likely a bracket or support, showing dimensions 44.5 and 62.5. The drawing includes a cross-section of the part, a hatched area indicating a specific material or section, and dimension lines with arrows pointing to the relevant features.

$\frac{1}{2}$ " Conic ISO 228  
or  $\frac{1}{2}$ " ISO 7-1 Rc

### Cross-section

