



DF250141
Dishwasher 200 series
fully integrated
Height 81.5 cm, width 45 cm

6 programmes with aqua sensor and 2 options, Power and Intensive: Clean and dry dishes in 65 minutes Intensive cleaning in the lower basket while protecting glassware in the upper basket Flexible basket system including cutlery drawer for optimal loading Remaining time projection onto the kitchen floor Bright interior light Very quiet: 44 dB Energy efficiency class A+++ Aqua stop with guarantee

Color Variants

DF250141
fully integrated
Height 81.5 cm, width 45 cm

Included accessories

1 x baking tray spray head.

Optional accessories

DA042030
Silvercare cartridge for all dishwashers

Installation Accessories

DA020010
Stainless steel trim kit for 81,5 cm high dishwashers
DA021000
Hinge for all fully integrated dishwashers
GH035010
Handle bar with 2 mounts, stainless steel, Length 35 cm, drilling distance 327 mm
GZ010011
Aqua stop extension (2 m long)

Handling

Display indicating remaining or end time, refill for salt and rinsing agent, inflow of water.
Time delay up to 24 hours.
Remaining time projection.

Features

Bright interior light.
Glass protection with zeolite.
Aqua sensor.
Load sensor.
Automatic detergent function.
Regeneration electronics.
Heat exchanger - Hygienic and efficient drying
Continuous flow heater.
Triple filter system, self-cleaning.
Soft lock.
Aqua stop with guarantee.

Programmes

6 programmes:
Auto 65 °C - 75 °C.
Auto 45 °C - 65 °C.
Auto 35 °C - 45 °C
Standard Eco 50 °C.
Quick wash 45 °C (29 min.).
Pre-rinse.
2 Options:
Power.
Intensive.

Features

Flexible basket system.
Cutlery drawer.
Upper basket:
Rackmatic with 3 levels, adjustable in height up to 5 cm.
3 folding spines.
1 folding rack.
Lower basket:
4 folding spines.
1 folding rack.
Glass support.
Cutlery basket.
Maximum dish sizes (upper/lower basket)
19/25, 16.5/27.5 or 14/31 cm respectively.
10 place setting capacity.

Product rating

Energy efficiency class A+++.
From 9.5 l water.
From 0.66 kWh.
Noise level 44 dB (re 1 pW).

Planning notes

Height-adjustable feet.
Appliance plinth recess 100 mm (see drawing).
To display the remaining time projection, a minimum plinth protrusion must be present (40 mm + thickness of the furniture front).

Characteristics

Water consumption (l)
9.5
Construction type
Built-in
Height of removable worktop (mm)
0
Required niche size for installation (HxWxD)
815-875 x 450 x 550
Depth with open door 90 degree (mm)
1150
Adjustable feet
Yes - front only
Maximum adjustability feet (mm)
60
Adjustable plinth
both horizontal and vertical
Net weight (kg)
40.740
Gross weight (kg)
42.5
Connection rating (W)
2400
Current (A)
10
Voltage (V)
220-240
Frequency (Hz)
50; 60
Length of electrical supply cord (cm)
175
Plug type
Gardy plug w/ earthing
Length inlet hose (cm)
165
Length outlet hose (cm)
205
EAN code
4242006261580

Consumption and connection features

Number of place settings
10
Energy efficiency class (2010/30/EC)
A+++
Energy consumption annual (kWh/annum) - NEW (2010/30/EC)
188.00
Energy consumption (kWh)
0.66
Power consumption in left-on mode (W) - NEW (2010/30/EC)
0.10
Power consumption in off-mode (W) - NEW (2010/30/EC)
0.10
Water consumption annual (l/annum) - NEW (2010/30/EC)
2660
Drying performance
A
Reference programme
Eco
Total cycle time of reference programme (min)
195
Noise level (dB(A) re 1 pW)
44
Installation type
Full-integrated


created on 2020-04-17
Page 1

The maximum plinth height must be reduced by 30 mm to provide an optimal display of the remaining time projection.
Rear feet adjustable at front.
Door panel dimension dependent on plinth height of kitchen furniture.
For installation into a tall unit, ventilation openings are provided (min. 150 cm²).

Connection

Total connected load 2.4 kW.
Connecting cable plugable.
Water connection with 3/4" screw joint.
Connection to hot or cold water possible.

Connection dimensions for a 45 cm wide dishwasher

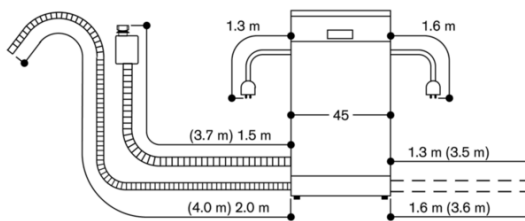

() values with extension kit