



**RB282306**  
**Fridge-freezer combination 200 series**  
**with fresh cooling close to 0 °C**  
**fully integrated**  
**Niche width 56 cm, Niche height 177.5 cm**



Four climate zones incl. two fresh cooling drawers close to 0 °C  
 Height adjustable safety glass shelves  
 Door racks with aluminium profiles  
 Cushioned door closing system allowing a soft and controlled door closure  
 Total volume 223 litres

**Handling**

Electronic temperature control with digital display.  
 Touch keys.

**Features**

Automatic defrosting with defrost water evaporation.  
 Cushioned door closing system from 20° door opening angle, integrated in door hinge.  
 Open-door and malfunction alarm.  
 Holiday mode.  
 Integrated WiFi module for digital services (Home Connect).  
 The availability of the Home Connect functionality depends on the availability of the Home Connect Services in your country. Home Connect Services are not available in every country – for further information please check: [www.home-connect.com](http://www.home-connect.com)

**Cooling**

Fast cooling.  
 Temperature adjustable from +3 °C to +8 °C.  
 1 integrated shelf.  
 Wine and champagne rack for 4 bottles, can be completely folded.  
 1 large door rack with aluminium profile for bottles with flexible bottle holder.  
 1 door rack with aluminium profile.  
 Bright interior lighting with integrated glare-free LED side light element.  
 Volume 101 litres.

**Fresh cooling close to 0 °C**

Humidity can be adjusted manually.  
 Ideal for fruit and vegetables.  
 Ideal for meat, fish and poultry.  
 Net volume 55 litres.

**Freezing**

No-frost technology with fast freezing.  
 Temperature adjustable from -14 °C to -24 °C.  
 4-star freezer compartment.  
 Defrost assistance.  
 Freezing capacity 7 kg /24 h.  
 Storage time after a malfunction 8 h.  
 Volume 67 litres.

**Product rating**

Energy efficiency class D at a range of energy efficiency classes from A to G.  
 Energy consumption 201 kWh/year.  
 Noise level 37 dB (A) re 1 pW.

**Planning notes**

Flat hinge.  
 Door hinge right, reversible.  
 Door opening angle of 115°, fixable at 90°.  
 Max. door panel weight:  
 Upper door 19 kg. Lower door 19 kg.

**Connection**

Total connected load 0.09 KW.  
 Connecting cable 2.3 m with plug.

**Characteristics**

**Energy Efficiency Class**  
 D  
**Average annual energy consumption in kilowatt hour per year (kWh/a)**  
 201  
**Sum of volume of frozen compartments**  
 67  
**Sum of volume of chill compartments**  
 156  
**Airborne acoustical noise emissions**  
 37  
**Airborne acoustical noise emission class**  
 C  
**Construction type**  
 Built-in  
**Door panel options**  
 Not possible  
**Height**  
 558  
**Width of the appliance**  
 558  
**Depth of the product**  
 545  
**Required niche size for installation (HxWxD)**  
 1775.0 x 560 x 550  
**Net weight**  
 75.0  
**Connection rating**  
 90  
**Fuse protection**  
 10  
**Door hinge**  
 Right reversible  
**Voltage**  
 220-240  
**Frequency**  
 50  
**Approval certificates**  
 CE  
**Length of electrical supply cord**  
 230  
**Storage Period in Event of Power Failure (h)**  
 8  
**Number of compressors**  
 1  
**Number of independent cooling systems**  
 2  
**Interior ventilator**  
 No  
**Reversible Door Hinge**  
 Yes  
**Number of Adjustable Shelves in fridge compartment (Stck)**  
 2  
**Shelves for Bottles**  
 Yes  
**Frost free system**  
 Freezer  
**Installation type**  
 Full-integrated  
**Type of hinge**  
 Flush-folding

**Consumption and connection features**

created on 2022-06-14  
 Page 1

**Color Variants**

**RB282306**  
**with fresh cooling close to 0 °C**  
**fully integrated**




**Included accessories**

- 2 x cold accumulator.
- 3 x egg tray.
- 1 x wine and champagne rack.
- 1 x ice cube tray.

**Optional accessories**

**RA430100**

RB282306  
 Fridge-freezer combination 200 series  
 with fresh cooling close to 0 °C  
 fully integrated  
 Niche width 56 cm, Niche height 177.5  
 cm  
 created on 2022-06-14  
 Page 2

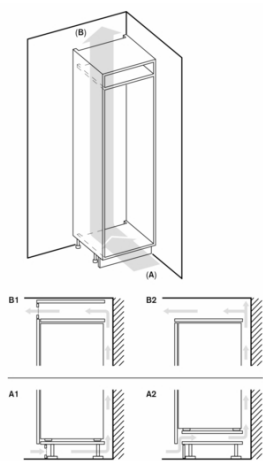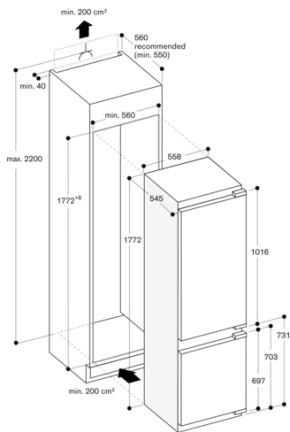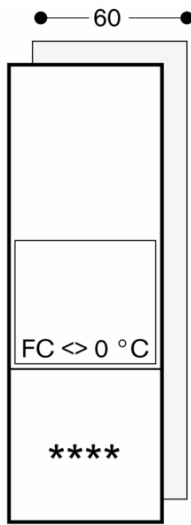

A: Air inlet  $\geq 200\text{ cm}^3$ ; ventilation options A1 or A2  
 B: Air outlet  $\geq 200\text{ cm}^3$ ; ventilation options B1 or B2