



RB289300
Vario fridge-freezer combination 200 series
 with fresh cooling close to 0 °C
 fully integrated
 Niche width 56 cm, Niche height 177.5 cm



Interior with precision-fitted, solid aluminium elements in Gaggenua Light Bronze
 Extendable shelves and drawers
 Warm white and glare-free LED light
 Four climate zones incl. two fresh cooling drawers close to 0 °C
 Height-adjustable, extendable safety glass shelves, set in solid aluminium profiles
 Cushioned door closing system allowing a soft and controlled door closure
 Smooth running fully extendable telescopic pull out racks and a cushioned closing system allow a soft and controlled closure of the drawers
 Solid maple bottle supports with magnetic connector
 Total volume 223 litres

Handling
 Electronic temperature control with digital display.
 Touch keys.

Features
 Automatic defrosting with defrost water evaporation.
 Cushioned door closing system from 20° door opening angle, integrated in door hinge.
 Open-door and malfunction alarm.
 Holiday mode.
 Integrated WiFi module for digital services (Home Connect).
 The availability of the Home Connect functionality depends on the availability of the Home Connect Services in your country. Home Connect Services are not available in every country – for further information please check: www.home-connect.com

Cooling
 Fast cooling.
 Temperature adjustable from +3 °C to +8 °C.
 1 frosted white glass shelf.
 2 oiled, solid maple bottle supports with magnetic connector, can be increased to 5 supports per shelf.
 A total of 9 bottles (based on a 0.75 l bottle) can be stored on one level using 5 bottle supports.
 The bottle supports are also suitable for storing champagne bottles and magnums.
 1 large aluminium door rack for bottles.
 Volume 101 litres.

Fresh cooling close to 0 °C
 Drawers with solid aluminium handles and signature drawer front with a gradual frosted surface.
 Humidity can be adjusted manually.
 Ideal for fruit and vegetables.
 1 fully extendable fresh cooling drawer close to 0 °C, illuminated.
 Ideal for meat, fish and poultry.
 Net volume 55 litres.

Freezing
 No-frost technology with fast freezing.
 Temperature adjustable from -14 °C to -24 °C.
 4-star freezer compartment.
 Drawers with solid aluminium handles and signature drawer front with a gradual frosted surface.

Characteristics
Energy Efficiency Class
 D
Average annual energy consumption in kilowatt hour per year (kWh/a)
 201
Sum of volume of frozen compartments
 67
Sum of volume of chill compartments
 156
Airborne acoustical noise emissions
 37
Airborne acoustical noise emission class
 C
Construction type
 Built-in
Door panel options
 Not possible
Height
Width of the appliance
 558
Depth of the product
 545
Required niche size for installation (HxWxD)
 1775.0 x 560 x 550
Net weight
 75.6
Connection rating
 90
Fuse protection
 10
Door hinge
 Right reversible
Voltage
 220-240
Frequency
 50
Approval certificates
 CE
Length of electrical supply cord
 230
Storage Period in Event of Power Failure (h)
 8
Number of compressors
 1
Number of independent cooling systems
 2
Interior ventilator
 No
Reversible Door Hinge
 Yes
Number of Adjustable Shelves in fridge compartment (Stck)
 2
Shelves for Bottles
 Yes
Frost free system
 Freezer
Installation type
 Full-integrated
Type of hinge
 Flush-folding

Consumption and connection features
 created on 2022-06-14
 Page 1

Defrost assistance.
 Freezing capacity 7 kg /24 h.
 Storage time after a malfunction 8 h.
 Volume 67 litres.

Product rating
 Energy efficiency class D at a range of energy efficiency classes from A to G.
 Energy consumption 201 kWh/year.
 Noise level 37 dB (A) re 1 pW.

Planning notes
 Flat hinge.
 Door hinge right, reversible.
 Door opening angle of 115°, fixable at 90°.
 Max. door panel weight:
 Upper door 19 kg. Lower door 19 kg.

Connection
 Total connected load 0.09 KW.
 Connecting cable 2.3 m with plug.

Color Variants
RB289300
 with fresh cooling close to 0 °C
 fully integrated

Included accessories
 2 x cold accumulator.
 2 x egg tray.
 1 x ice cube tray.
 2 x wooden bottle holder magnetic.

Optional accessories
RA238030
 Solid maple bottle support with magnetic connector, oiled
RA430100

RB289300

Vario fridge-freezer combination 200 series





with fresh cooling close to 0 °C

fully integrated

Niche width 56 cm, Niche height 177.5 cm

created on 2022-06-14

Page 2

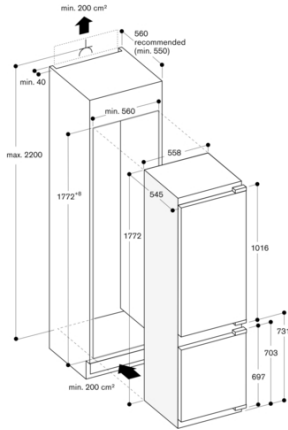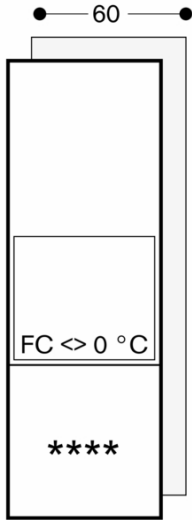

A: Air inlet $\geq 200\text{ cm}^2$; ventilation options A1 or A2
B: Air outlet $\geq 200\text{ cm}^2$; ventilation options B1 or B2

GAGGENAU