



Color Variants

VG264120F
Black control panel
Width 60 cm

Installation Accessories

VV200010
Stainless steel connection strip
for combination with other Vario
appliances of the 200 series
VV200020
Black connection strip for combination
with other Vario appliances of the 200
series

VG264120F
Vario gas cooktop 200 series
Black control panel
Width 60 cm
Liquid gas 28 - 37 mbar

Can be combined with the cooktops
of the Vario 200 series to a harmonic
unity
Control panel for comfortable and
secure operation
Mechanical power level regulation for
9 power levels, with exact setting and
reproduction of flame size
Solid smooth-surface cast pan
supports for easy and safe
positioning of cookware
Up to 9.8 KW on 4 burners

Cooking zones
2 high output burner (560 W - 3000 W),
suitable for pots up to max. ø 22 cm.
2 standard burners (380 W – 1900 W),
suitable for pots up to max. ø 20 cm.

Handling
Control knobs with illuminated ring.
Integrated control panel.
One-handed operation.
Electric ignition.

Features
Two-part cast iron pan support with
continuous pot surface.
Enamelled burner cover.



Safety
Thermoelectric safety pilot.
Residual heat indication.
Operation indicator.

Planning notes
Special nozzles for natural gas 20 mbar
can be ordered as spare parts.
No intermediate shelf required.
Appliance can be snapped into the
worktop from above.
A minimum lateral clearance of at least
150 mm from adjacent heat-sensitive
furniture or contact surfaces must be
observed or thermal insulation fitted.
With a total connected load of
more than 11 kW local regulations
concerning room ventilation, room
size and combination of extraction or
recirculation hoods must be observed.
Minimum clearance between gas
cooktop(s) with more than 11 kW and
ventilation hood 70 cm.
Appliance weight: approx. 15 kg.

Connection
Total connected load gas 9.8 kW.
Total connected load electric 10.0 W.
Connecting cable 1.5 m with plug.

Characteristics
Product name/family
gas hob w integrated controls
Built-in / Free-standing
CONSTR_TYPE.Built-in
Energy input
Gas
Total number of positions that can be
used at the same time
4
Required niche size for installation
(HxWxD)
106 x 560 x 492
Width of the product (mm)
580
Dimensions of the product (mm)
106 x 580 x 512
Dimensions of the packed product
(HxWxD) (mm)
250 x 600 x 780
Net weight (kg)
15.382
Gross weight (kg)
17.0
Residual heat indicator
Separate
Location of control panel
Hob front
Basic surface material
brushed stainless steel
Color of surface
Stainless steel
Color of frame
Stainless steel
Approval certificates
VDE
Length electrical supply cord (cm)
150

Consumption and connection features
Electrical connection rating (W)
10
Gas connection rating (W)
9800
Current (A)
10
Voltage (V)
220-240
Frequency (Hz)
60; 50
2019-05-13
Page 1

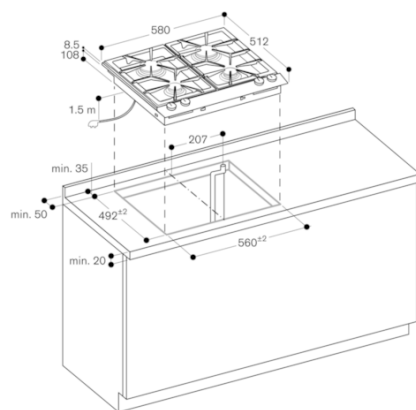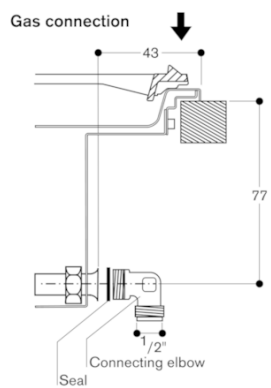

Minimum distance from the appliance cut-out to the side wall 150 mm.