



**AL200180**  
**Table ventilation 200 series**  
**Width80 cm**  
**Air extraction/recirculation**  
**Delivery without ducting**

Telescopic table ventilation for combination with all Gaggenau cooktops, completely retractable when not in use  
 Perfect in combination with frameless induction cooktops80 cmwide for flush mounting  
 Transparent ventilation screen for discreet integration in the kitchen space  
 Ambient lighting through the glass edges  
 Guided Air technology ensures high vapour catch rate across the whole cooktop

#### Output

Performance and noise level, output level 3/Intensive:  
 Air output according to DIN EN 61591. Sound power level according to EN 60704-3.  
 Sound pressure level according to EN 60704-13.  
 Air extraction:  
 501/775 m<sup>3</sup>/h.  
 62/70dB (A) re 1 pW.  
 Air recirculation (with standard activated filters):  
 447/562 m<sup>3</sup>/h.  
 65/70dB (A) re 1 pW.  
 Odour reduction: > 90 %

#### Features

Cooktop-based ventilation control. Automatic function with sensor-controlled run-on function.  
 Three electronically controlled power levels and an intensive mode.  
 Grease filter saturation indicator. Activated charcoal filter saturation indicator.  
 2 large-scale metal grease filters included, easy to remove, dishwasher-safe.  
 Overflow capacity 170 ml in grease filter. Additional capacity 600 ml in the remote fan unit.  
 Activated charcoal filter easily removeable from above for air recirculation system.  
 Gaggenau Black anodized aluminium frame.  
 1 user interface to set the power levels and 1 user interface to control the Guided Air technology.  
 Fan technology with highly efficient, brushless DC motor.  
 Flexible installation of the fan unit at the front (for a compact wall solution), at the back (without loss of drawer space), or at a distance from the appliance.  
 Integrated WiFi module for digital services (Home Connect).  
 The availability of the Home Connect functionality depends on the availability of the Home Connect Services in your country. Home Connect Services are not available in every country – for further information please check: [www.home-connect.com](http://www.home-connect.com)

#### Product rating

Energy efficiency classAat a range of energy efficiency classes from A+++ to D.  
 Energy consumption36.9 kWh/year.  
 Ventilation efficiency classA.  
 Illumination efficiency class-.  
 Grease filter efficiency classB.

**Characteristics**  
**Product name/family**  
**Color chimney**  
**Typology**  
**Approval certificates**  
 CE, Eurasian, G-Mark, VDE  
**Length of electrical supply cord (cm)**  
 130  
**Required niche size for installation (HxWxD)**  
 703mm x 781.0mm x 123mm  
**Height of the chimney (mm)**  
**Height of product, without chimney (mm)**  
**Minimum distance above an electric hob**  
**Minimum distance above a gas hob**  
**Net weight (kg)**  
 37.106  
**Type of control**  
 Electronic  
**Number of speed settings**  
 3-stage + 2 intensive  
**Maximum output air extraction (m3/h)**  
 501  
**Boost position output recirculating (m3/h)**  
 562.0  
**Maximum output recirculating air (m3/h)**  
 447  
**Boost position air extraction (m³/h)**  
 775  
**Number of lights (Stck)**  
**Noise level (dB(A) re 1 pW)**  
 62  
**Diameter of air outlet (mm)**  
 150  
**Grease filter material**  
**EAN code**  
 4242006292812

#### Consumption and connection features

**Connection rating (W)**  
 300  
**Current (A)**  
 10  
**Voltage (V)**  
 220-240  
**Frequency (Hz)**  
 50; 60  
**Plug type**  
 Gardy plug w/ earthing  
**Installation type**  
 Built-in  
**created on 2021-01-13**  
**Page 1**

Sound level min.39 dB/ max.62 dBnormal mode.

#### Planning notes

Compatible with frameless cooktops 400 series (CX 482) or 200 series (CI 282 / CI 283), in a single worktop cut-out.  
 For installation in a single worktop cut-out the installation accessory must be placed between the appliances. This includes a connection strip and furniture supports that ensure cabinet stability.  
 The table ventilation can be installed in the cabinet or between two (e.g. for an island installation deeper than 100 cm). Width of the cabinets 90 cm, 100 cm or 120 cm.  
 No upper cabinets should be installed above the table ventilation to maintain optimum performance.  
 The following distance should be observed:  
 - 50 cm left and right of the table ventilation to the wall or neighbouring tall cabinets.  
 - 5 cm from the table ventilation frame to the wall.  
 Installation is possible in worktops made of stone, synthetics or solid wood. Heat resistance and watertight sealing of the cut edges must be observed. Concerning other materials please consult the worktop manufacturer.  
 To install the fan unit at a distance, an installation kit is required (with spare covers for closing air outlets). Maximum distance 3 m.  
 In air extraction a one-way flap with a maximum opening pressure of 65 Pa should be installed.  
 In air extraction mode, always ensure adequate fresh air in the room if the appliance is being operated at the same time as a chimney-vented fireplace.  
 For optimum performance in air recirculation we recommend an outflow surface area of at least 440 cm<sup>2</sup>.  
 For air recirculation, an air recirculation module is required.

#### Connection

Total connected load300 W.  
 Power consumption standby/display off0.4 W.  
 Please check the user manual for how to switch off the WiFi module.  
 Connection cable1.3 m, pluggable.

#### Color Variants

**AL200180**  
**Width80 cm**  
**Air extraction/recirculation**

#### Optional accessories

**AA200100**  
**Activated charcoal filters**  
**AA200880**  
**Air recirculation module including activated charcoal filters**  
**AA200882**  
**Regenerable air recirculation module including activated charcoal filter**

#### Installation Accessories

**AA200910**  
**Installation kit for fan unit at a distance (3m maximum)**  
**Combinable with the table ventilation AL 200**  
**VA200080**  
**Installation kit for installation in a single worktop cut-out**  
**Combinable with the table ventilation AL 200 180**

AL200180

Table ventilation 200 series


Width 80 cm

Air extraction/recirculation

Delivery without ducting


created on 2021-01-13

Page 2

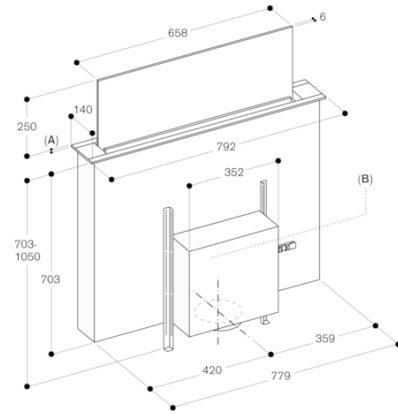

A: 5.5  
B: Flexible installation of the fan unit at the front, at the back or at a distance from the appliance (installation kit required)

measurements in mm

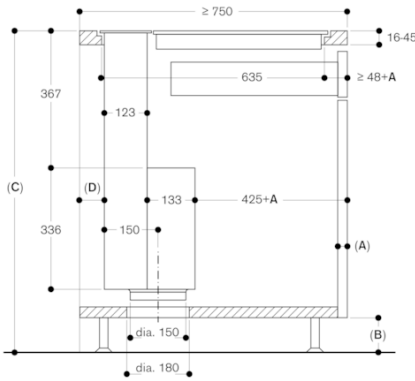


A: Front thickness  
B: ≥ 60 mm for air recirculation  
C: ≥ 100 mm for air extraction with ducting in the plinth  
D: At least 2 cm from the guided-air suction area to a cabinet wall

measurements in mm

View from above


Compatible with frameless 400 series (CX 482) or 200 series (CI 282/CI 283) hobs

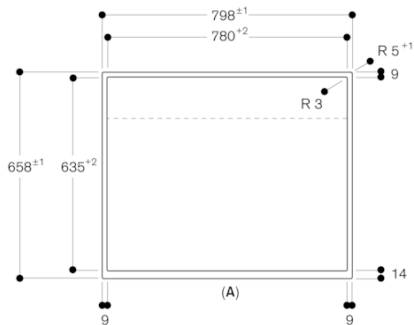

A: Front


measurements in mm

Compatible with frameless 400 series (CX 482) or 200 series (CI 282/CI 283) hobs

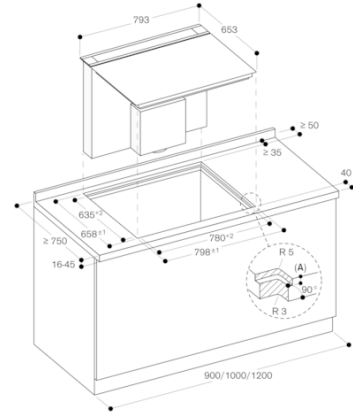

A: 6.5<sup>+0.5</sup>  
measurements in mm


Cross-section

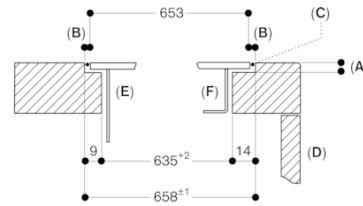

A: 6.5<sup>+0.5</sup>  
B: 2.5  
C: Fill with silicone  
D: Front  
E: Table ventilation  
F: Induction hob

measurements in mm

Longitudinal section

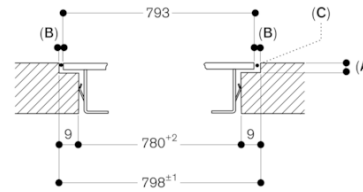

A: 6.5<sup>+0.5</sup>  
B: 2.5  
C: Fill with silicone  
measurements in mm

GAGGENAU