



CMP250112
Fully automatic espresso machine 200 series
Full glass door in Gaggenau Metallic
Width 60 cm
controls at the top

Handless door / cushioned door closing system
 Continuous flow heater means no waiting time and constant brewing temperature
 Aroma brewing technology for a full aroma
 Single portion cleaning
 TFT touch display
 Panel-free appliance with surface control module
 One-touch operation
 Personalisation function
 Seven light settings
 Electronic fill level control for milk, water and coffee to ensure a perfect result

Type of beverage

Ristretto / 2 x Ristretto.
 Espresso / 2 x Espresso.
 Espresso Macchiato / 2 x Espresso Macchiato.
 Coffee / 2 x Coffee.
 Americano / 2 x Americano.
 Caffe Latte / 2 x Caffe Latte.
 Latte Macchiato / 2 x Latte Macchiato.
 Cappuccino / 2 x Cappuccino.
 Flat White / 2 x Flat White.
 Milk froth / 2 x Milk froth.
 Warm milk / 2 x Warm milk.
 Hot water / 2 x Hot water.

Handling

Door with cushioned door closing system.
 Rotary knob and TFT touch display operation.
 Clear text display.
 Personalisation function, up to 8 beverages can be personalised and memorised.
 4 beverage size settings, volume can be individually adjusted to match the size of the cup.
 8 coffee strength levels from very mild to extra strong.
 Coffee: 3 grades.
 Hot water: 10 grades.
 4 coffee-milk ratio levels.
 Adjustable grinding level.
 Height-adjustable coffee dispenser 7 cm to 15 cm.
 Easy access to water tank, milk and coffee bean container behind the door.

Features

Maintenance-free grinding unit with ceramic discs.
 Separate drawer for second ground coffee type.
 Water pump with 19 bar pressure.
 Double grinding and brewing cycles for extra intensity for one beverage.
 Double grinding and brewing cycles for two beverages.
 Dispenser with integrated milk system.
 Insulated stainless steel milk container for up to 0.5 litres.
 Integrated lightning with LEDs.
 Removable bean container with aroma protecting lid for 500 g allows for an effortless exchange of different types of coffee beans.
 Automatic adjustment of ground coffee quantity.
 Removable 2.4 litre water tank.
 Electronic water filter exchange indicator.
 Electronic fill level control for drip tray and container for coffee dregs.

Characteristics

Construction type
 Built-in
Frothing nozzle
 No
Display
 No
Water protection system
 No
Portion sizes
 All cups
Dimensions
 455 x 590 x 426
Dimensions of the packed product (HxWxD) (mm)
 540 x 475 x 670
Required niche size for installation (HxWxD)
 449 x 558 x 356
EAN code
 4242006278922

Consumption and connection features

Electrical connection rating (W)
 1600
Current (A)
 10
Voltage (V)
 220-240
Frequency (Hz)
 50/60
Plug type
 Gardy plug w/ earthing
created on 2021-01-10
Page 1

Home network integration for digital services (Home Connect) either via cable connection LAN (recommended) or wireless via WiFi.
 The availability of the Home Connect functionality depends on the availability of the Home Connect Services in your country. Home Connect Services are not available in every country – for further information please check: www.home-connect.com

Safety

Child lock.

Cleaning

Fully automatic rinse programme when machine is turned on/off.
 Automatic steam cleaning of the milk system after every beverage.
 Automatic cleaning and descaling programme.
 Emptying programme to prepare the appliance for holiday or transportation.
 Empty-grinding function to remove coffee residues from the system when switching bean types.
 Removable brewing unit.
 Coffee dregs container and drip tray dishwasher-safe.
 Milk frother dishwasher-safe.

Planning notes

Door hinge not reversible.
 Left-hinged
 Necessary lateral gap between appliance front and furniture panel of min. 5 mm.
 The door panel surface of the appliance extends 21 mm from the furniture cavity.
 When installing in a corner a side clearance is required.
 Door opening angle appr. 110° (delivery status) - mounting distance to the wall has to be at least 350 mm.
 Door opening angle appr. 155° - mounting distance to the wall has to be at least 650 mm.
 Door opening angle appr. 92° - mounting distance to the wall has to be at least 100 mm (spare part No. 00636455).
 Installation directly above 14 cm high WS in 59 cm standardised niche.
 The LAN port can be found at the back on the lower right side.
 Special accessories (order as spare parts):
 Part No. 17000705 Water filter
 Part No. 00311819 Descaling tablets
 Part No. 00311769 Cleaning tablets
 Part No. 00636455 Door hinge restrictor (92° opening angle)
 Part No. 11015223 Bean container with lid

Connection

Total connected load Total connected load 1.6 KW.
 Connection cable 1.7 m, pluggable.
 Plan a LAN cable.
 Power consumption standby/display off 0.5 W.
 Power consumption standby/network 2 W.
 Time auto-standby/display on 30 min.
 Time auto-standby/network 30 min.
 Please check the user manual for how to switch off the WiFi module.


Color Variants

CMP250112
Full glass door in Gaggenau Metallic
Width 60 cm
CMP250102
Full glass door in Gaggenau Anthracite
Width 60 cm
CMP250132
Full glass door in Gaggenau Silver
Width 60 cm


Included accessories

1 x assembly screws.
 1 x scoop.
 1 x test strip.
 1 x milk container (insulated).
 1 x connection hose for milk frother.
 1 x milk pipe.

CMP250112
Fully automatic espresso machine 200
series
Full glass door in Gaggenau Metallic
Width 60 cm
controls at the top
created on 2021-01-10
Page 2

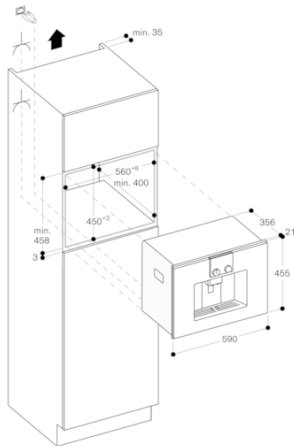

Left corner installation

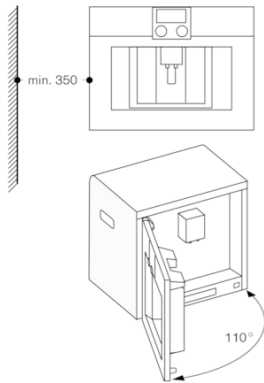

If using the 92° door hinge restrictor (spare part no. 00636455), the minimum distance from the wall is only 100 mm.