



RF200203



200 series  
82 x 59.8 cm, soft close flat hinge  
**RF200203**

- Different climate zones incl. fresh cooling drawers close to 0 °C
  - Door racks with aluminium profiles
  - Height adjustable safety glass shelves
  - Combines with cooler RC 200 (Side-by-Side)
- Cushioned door closing system allowing a soft and controlled door closure  
Total volume 106 litres

#### Features

Cushioned door closing system from 20° door opening angle, integrated in door hinge.  
Malfunction signal.

#### Freezing

Fast freezing.  
Temperature range adjustable.  
4-star freezer compartment.  
Freezing capacity 7.4 kg /24 h.  
Storage time after a malfunction 10 h.  
3 freezer drawers.

#### Product rating


Energy efficiency class F at a range of energy efficiency classes from A to G.  
Energy consumption 224 kWh/year.  
Noise level 38 dB (A) re 1 pW.

#### Planning notes

Flat hinge.  
Door hinge right, reversible.  
Door opening angle of 115°, fixable at 90°.  
Height-adjustable feet.  
Plinth height for appliance height of 820 mm:  
100 - 170 mm.  
Plinth height for appliance height of 870 mm:  
150 - 220 mm.  
The enclosed ventilation grille must be used.  
The main socket needs to be planned outside of the niche.

#### Connection

Total connected load 0.09 KW.  
Connecting cable 2.3 m with plug.

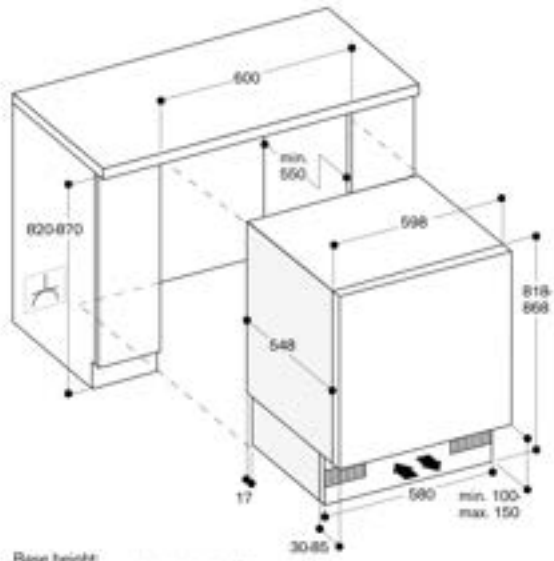

Base height:  
- 100 mm when niche height is 820 mm  
- 150 mm when niche height is 870 mm

60

