

Color Variants
VI414113
Width 38 cm

Optional accessories
GP900004
Stainless steel frying sensor pan
WP400001
Wok pan made of multiple-layer material
WZ400001
Wok attachment for wok pan

Installation Accessories
VA420000
Connection strip for combination with other Vario appliances of the 400 series for flush installation
VA420010
Connection strip for combination with other Vario appliances of the 400 series for surface installation

VI414113
Stainless steel frame
Width 38 cm

32 cm cooking zone with booster function  
Ideal for the original wok pan with round bottom, with wok ring  
Frying sensor function for temperature control in pans  
Easy control of all functions with two color displays  
Solid stainless steel control knob  
Precision crafting of 3 mm stainless steel  
For surface installation with a visible edge or for flush installation  
Can be combined perfectly with other Vario appliances of the 400 series

**Cooking zones**  
1 induction cooking zone ø 21 cm (2200 W, with booster 3700 W), automatically switches to ø 26 cm (2600 W, with booster 3700 W) and to ø 32 cm (3300 W, with booster 3700 W).

**Handling**  
Control knobs with illuminated ring, cooking zone and output level markings.  
Electronic power control in 12 pakāpes (1...12).  
User friendly control with two color display (white / orange).

**Features**  
Frying sensor function.  
Booster function.  
Stopwatch.  
Short-term timer.  
Options menu.  
Cooktop-based ventilation control (with suitable hood).  
Integrated WiFi module for digital services (Home Connect).  
The availability of the Home Connect functionality depends on the availability of the Home Connect Services in your country. Home Connect Services are not available in every country – for further information please check: [www.home-connect.com](http://www.home-connect.com)

**Safety**  
Safety shut-off.

**Planning notes**  
Depending on the type of installation (surface-mounted or flush-mounted), the specific location of the cut-out and the knob positions may vary.  
The drawing "Installation of the control knob" must be observed if the panel is more than 23 mm thick (there must be a recess at the rear).  
If combining several Vario appliances of the 400 series, a connection strip VA 420 must be placed between the appliances. Depending on the type of installation, the corresponding connection strip must be provided.  
The bearing capacity and stability, in the case of thin worktops in particular, must be supported using suitable substructures. Take into account the appliance weight and additional loads.  
Additional instructions for flush installation:  
Installation is possible in worktops made of stone, synthetics or solid wood. Heat resistance and watertight sealing of the cut edges must be observed. Concerning other materials please consult the worktop manufacturer.


Characteristics
Product name/family
Vario/Domino cooking zone cera
Built-in / Free-standing
CONSTR_TYPE.Built-in
Energy input
Electric
Total number of positions that can be used at the same time
1
Required niche size for installation (HxWxD)
57 x 360 x 490-500
Width of the product (mm)
380
Dimensions of the product (mm)
57 x 380 x 520
Dimensions of the packed product (HxWxD) (mm)
120 x 580 x 600
Net weight (kg)
9.678
Gross weight (kg)
10.7
Residual heat indicator
Location of control panel
External control
Basic surface material
Ceramic
Color of surface
Black, Stainless steel
Color of frame
Stainless steel
Approval certificates
AENOR, CE
Length of electrical supply cord (cm)
150
EAN code
4242006285012

Consumption and connection features
Electrical connection rating (W)
3700
Gas connection rating (W)
Current (A)
16
Voltage (V)
220-240
Frequency (Hz)
50; 60


created on 2020-04-20  
Page 1

The groove must be continuous and even, so that uniform placing of the appliance on the gasket is ensured. Do not use discontinuous lining.  
The joint width may vary due to size tolerances of the combinations and of the worktop cut-out.  
If installing several appliances in individual cut-outs allow for a division bar of minimum 50 mm between the individual cut-outs.  
Operates with magnetic (induction) iron pots and pans only. For an optimal heat distribution, the use of sandwich bottom cookware is recommended.  
Appliance can be snapped into the worktop from above.  
Appliance weight: approx. 10.


**Connection**  
Total connected load 3.7 KW.  
Connecting cable 1.5 m without plug.  
Power consumption standby/display off 0.2 W.  
Power consumption standby/network 1.4 W.  
Please check the user manual for how to switch off the WiFi module.

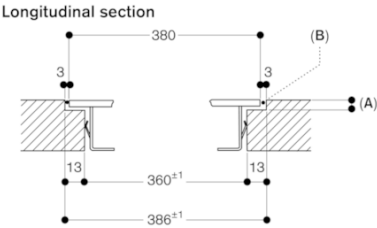


A: 3.5<sup>0.5</sup>  
B: Fill with silicone  
measurements in mm




measurements in mm

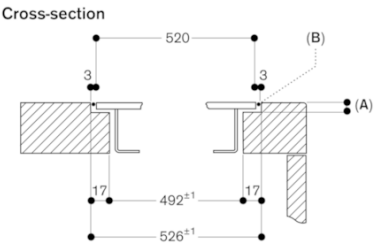

A: 3.5<sup>0.5</sup>  
B: Fill with silicone  
measurements in mm

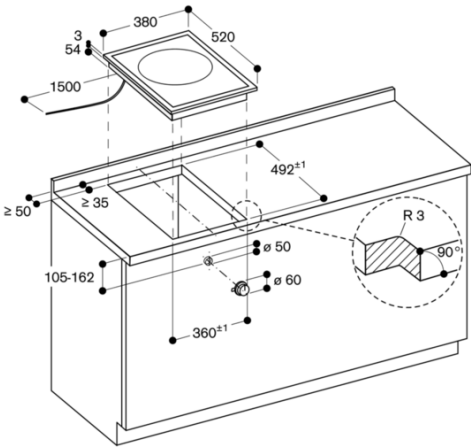

measurements in mm

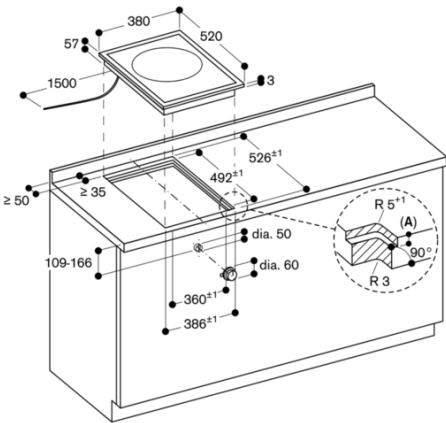

A: 3.5<sup>0.5</sup>  
measurements in mm